


Sandila/0

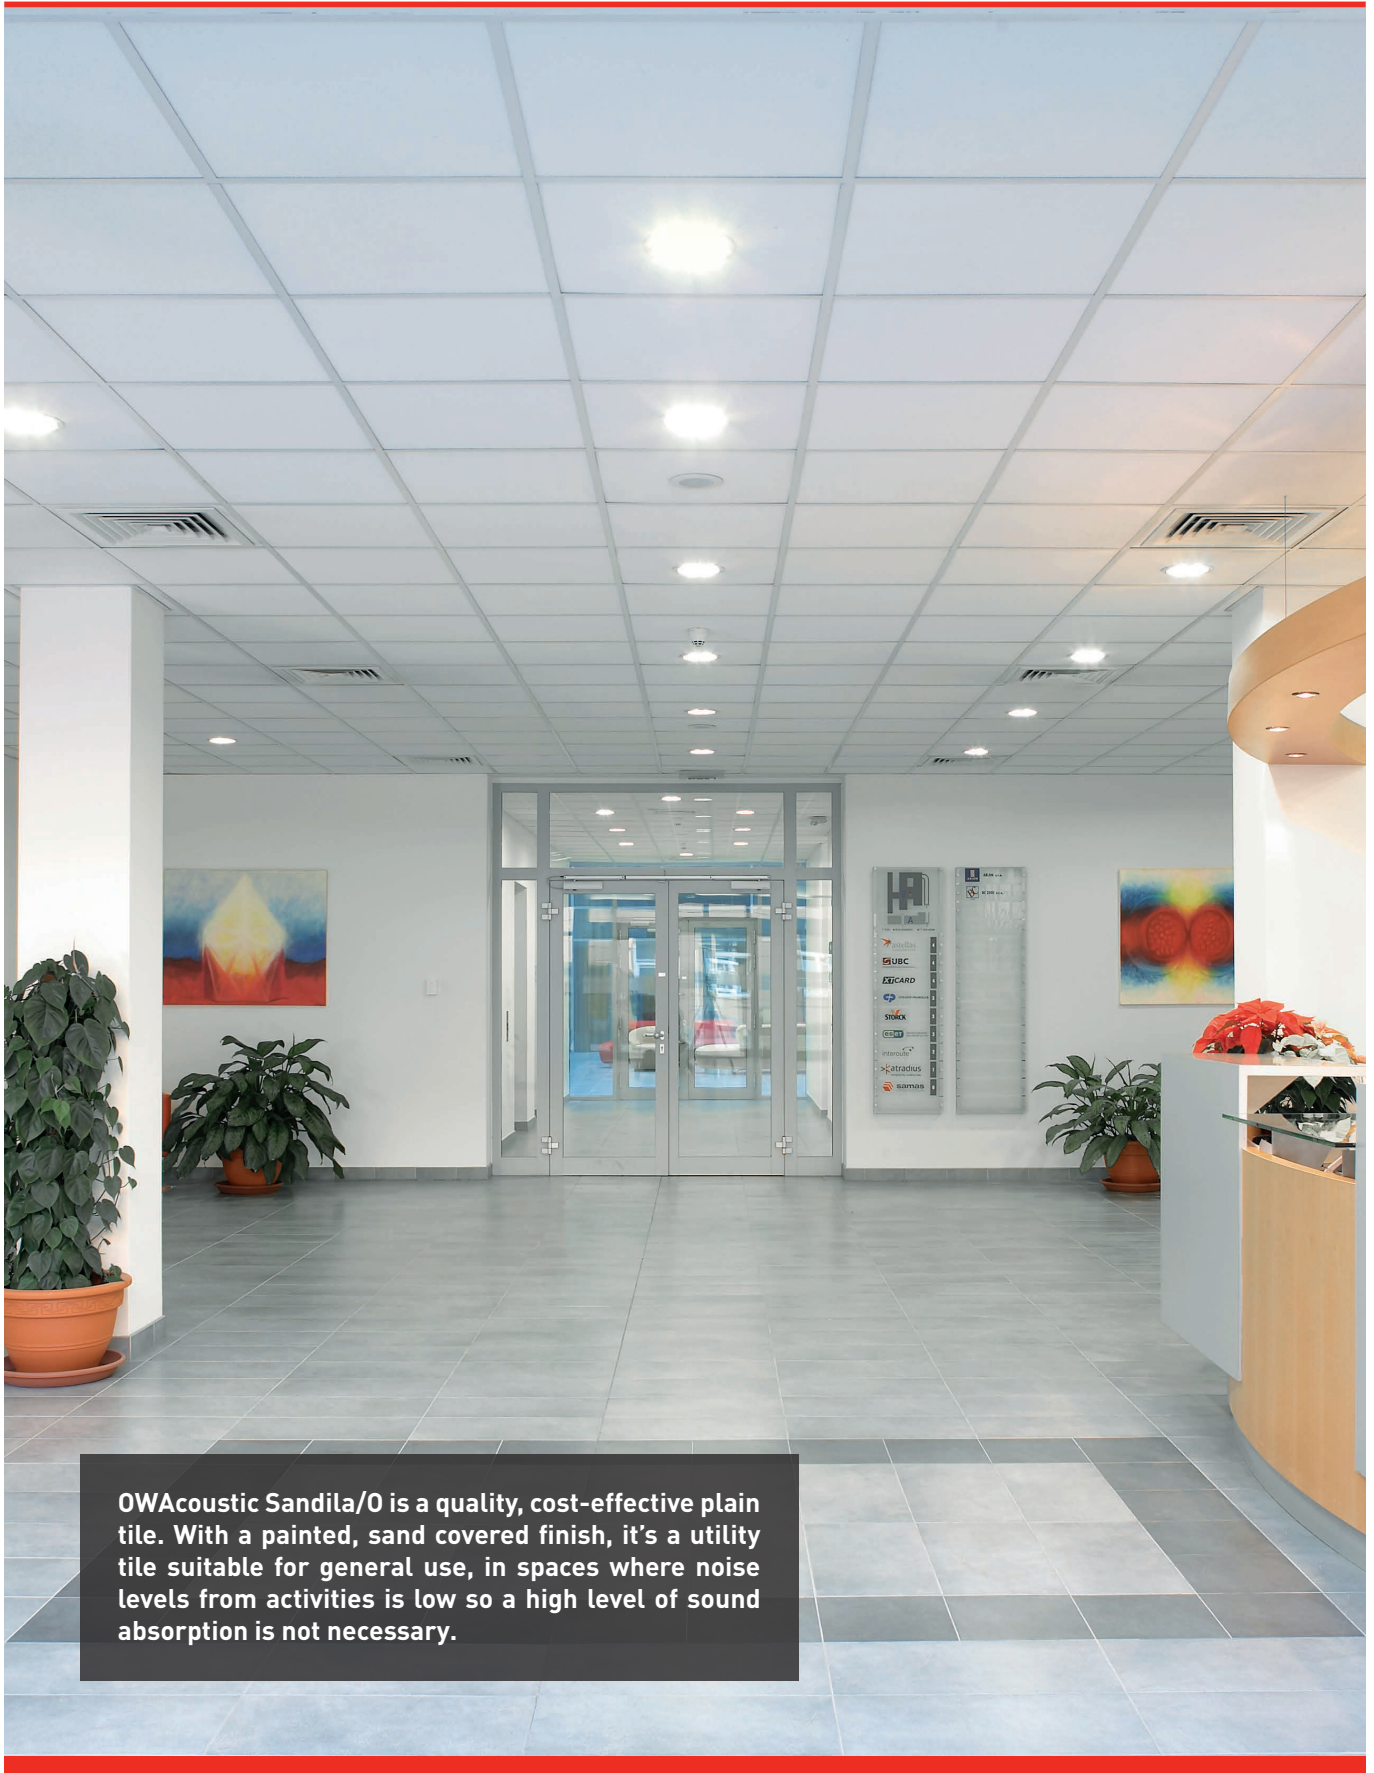

OWAcoustic Sandila/0 is a quality, cost-effective plain tile. With a painted, sand covered finish, it's a utility tile suitable for general use, in spaces where noise levels from activities is low so a high level of sound absorption is not necessary.

If you would like further information, please contact us via telephone or email:

T: +44(0)1753 552 489

E: enquiries@owa-ceilings.co.uk

www.owa-ceilings.co.uk

OWA

Sandila/O

Features:

- Made with natural, sustainable materials
- Acoustic board formulated without VOCs or formaldehyde
- Exceptionally low emissions, improves indoor air quality
- Tile density ensures the edges are crisp, easy to trim, no resealing necessary
- The percentage of recycled material used in the production of new tiles is up to 54%

| | |
|-------------------|--|
| Collection | OWAlifetime - OWAacoustic premium |
| Material | Classic mineral - painted tile, sand covered |
| Thickness | 14 mm (smart) and 15 mm |
| Colour | White |
| Edges | Square Edge (14 mm - edge 3), Teg24 (15 mm - edge 6) |



| | |
|---------------------------|--|
| Suspension system* | 24 mm: S 3 or S 3 cliq - suitable for SE and Teg24 15 mm: S 15 cliq - suitable for SE |
|---------------------------|--|

| | |
|-----------------|------------------------|
| Modules* | 600 x 600 mm (stocked) |
|-----------------|------------------------|

| | |
|-------------------------|-------------------|
| Sound absorption | $\alpha_w = 0.15$ |
|-------------------------|-------------------|

| | |
|-------------------------|-------------------|
| Sound insulation | $D_{nfw} = 33$ dB |
|-------------------------|-------------------|

| | |
|-------------------------|--------------------------|
| Reaction to fire | A2-s1,d0 (BS EN 13501-1) |
|-------------------------|--------------------------|

| | |
|------------------------|--|
| Fire resistance | Dependent on system, dimensions, soffit and other specific factors |
|------------------------|--|

| | |
|----------------------------|--------------------------------------|
| Moisture resistance | Up to 90% RH (14 mm), 95% RH (15 mm) |
|----------------------------|--------------------------------------|

| | |
|--------------------------|-----|
| Light reflectance | 87% |
|--------------------------|-----|

| | |
|---------------|-------------------------------|
| Weight | Approx. 4.3 kg/m ² |
|---------------|-------------------------------|

| | |
|-----------------|-------------|
| Cleaning | Vacuum only |
|-----------------|-------------|

| | |
|-----------------------|-----------------|
| Sustainability | 100% recyclable |
|-----------------------|-----------------|

| | |
|-----------------|--|
| Warranty | Tile = 10 years, installed system = 30 years** |
|-----------------|--|



* Other sizes and systems also available.

** The limited warranty is project specific. To comply, an accompanying warranty document must be completed and signed by the installing contractor and OWA project manager. If not, the standard 10 year product warranty will apply.