

Sandila/N



OWAacoustic premium Sandila/N is a high quality, cost-effective, class C sound absorber. With a painted, sand covered finish, it's suitable for general use, in particular offices, retail and education, lowering reverberation times in moderately noisy areas.

If you would like further information, please contact us via telephone or email:

T: +44(0)1753 552 489

E: enquiries@owa-ceilings.co.uk

www.owa-ceilings.co.uk

OWA

Sandila/N

Features:

- Made with natural, sustainable materials
- Acoustic board formulated without VOCs or formaldehyde
- Exceptionally low emissions, improves indoor air quality
- Tile density ensures the edges are crisp, easy to trim, no resealing necessary
- The percentage of recycled material used in the production of new tiles is up to 54%

Collection	OWAlifetime - OWAacoustic premium
Material	Classic mineral - painted tile, sand covered
Thickness	15 mm
Colour	White
Edges	Square Edge (edge 3), Teg24 (edge 6) and Microlook (edge 15)



Suspension system*	24 mm: S 3 or S 3 cliq - suitable for SE and Teg24 15 mm: S 15 cliq - suitable for SE and ML
---------------------------	---

Modules*	600 x 600 mm (stocked)
-----------------	------------------------

Sound absorption	$\alpha_w = 0.60$ (class C)
-------------------------	-----------------------------

Sound insulation	$D_{nfw} = 31$ dB
-------------------------	-------------------

Reaction to fire	A2-s1,d0 (BS EN 13501-1)
-------------------------	--------------------------

Fire resistance	Dependent on system, dimensions, soffit and other specific factors
------------------------	--

Moisture resistance	Up to 95% RH
----------------------------	--------------


Light reflectance	87%
--------------------------	-----

Weight	Approx. 4.3 kg/m ²
---------------	-------------------------------

Cleaning	Vacuum only
-----------------	-------------

Sustainability	100% recyclable
-----------------------	-----------------

Warranty	Tile = 10 years, installed system = 30 years**
-----------------	--

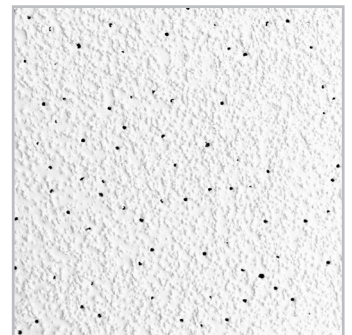

* Other sizes and systems also available.

** The limited warranty is project specific. To comply, an accompanying warranty document must be completed and signed by the installing contractor and OWA project manager. If not, the standard 10 year product warranty will apply.