S20 acoustic linear baffle system

S20 acoustic linear baffle system uses standard or perforated baffles with an additional perforated acoustic infill panel. The panel hooks over two adjacent baffles and is easily removable. Ideal for retail, offices, education, hospitality or any open plan spaces.

If you would like further information, please contact us via telephone or email:
T: +44(0)1753 552 489
E: enquiries@owa-ceilings.co.uk

www.owa-ceilings.co.uk

OWA

S20 acoustic linear baffle system

Features:

- Premium quality, German engineered
- Contemporary design, few components, easy to instal
- Baffles can be spliced to create longer lengths, end caps available
- Wood surface effect or any RAL colour available
- Additional acoustic infill panel increases the sound absorption potential

Collection	OWAtecta
Material	Galvanised steel, 0.6 mm
Dimensions	Width = 150-600 mm, height = 20-30 mm, length = 500-3000 mm
Surface*	Plain L0 or perforated (acoustic fleece and pad available)
Colour	Any RAL colour (MOQ may apply)
Lighting	Integrated LED lighting is available
Sound absorption*	Rd1522 with acoustic pad: α_W = 0.90 (class A) Rd1522 with fleece: α_W = 0.70 (class C)
Reaction to fire	A2-s1,d0 (BS EN 13501-1)
System weight	Dependent on baffle size and centres
Cleaning	Vacuum, wipe or dust only
Sustainability	100% recyclable
Warranty	Baffle = 10 years, installed system = 30 years**

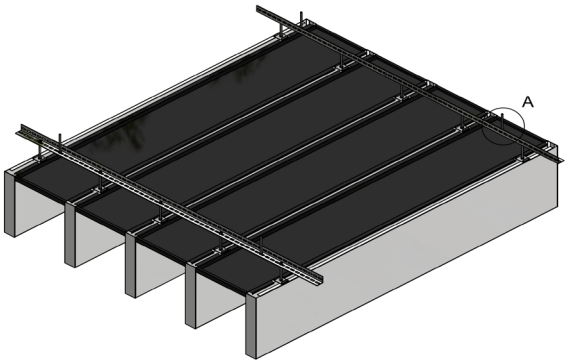

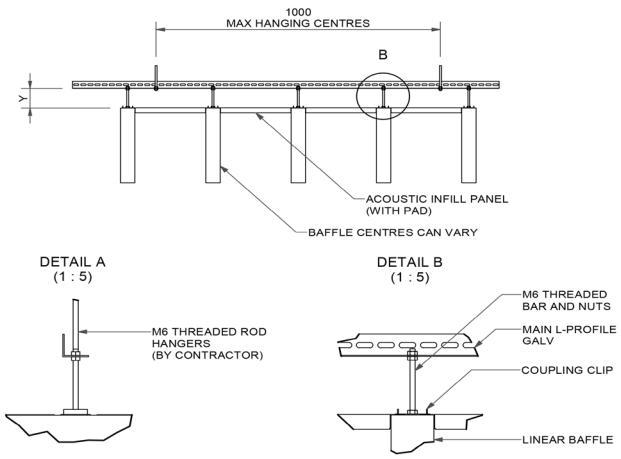

* Other perforations also available.

** The limited warranty is project specific. To comply, an accompanying warranty document must be completed and signed by the installing contractor and OWA project manager. If not, the standard 10 year product warranty will apply.